



**Mid-Range**

**TRAILERS**



Whatever the job. Wherever you go. Whenever duty calls. A **Road Force** cargo trailer has the muscle to move! Designed and built by **WELLS CARGO**, the company that pioneered the cargo trailer industry over 55 years ago, the feature-rich **Road Force** delivers a whole new level of value. From the rugged tubular steel main rails to the LED tail lights, the **Road Force** is no stranger to quality. So for the price of an ordinary trailer, you can step up to the quality and value of the extraordinary **Road Force**.



**Model RF5X81**



**Model RFV5X81**  
 >> **Options:** Rear Ramp Door



#### STANDARD FEATURES — 5' Wide Models

- Choice of: Radius Front/Radius Roof with TPO Silver Cap or V-Front/Flat Roof with Cast Aluminum Rear Corner Caps
- 12V Dome Lights (2) with Wall Switch
- 24" ATP Stoneguard
- Entire Chassis Undercoated
- Torflex Torsion Suspension with E-Z Lube Hubs
- 15" Radial Tires with Silver Spoke Wheels
- Smooth Aluminum Jeep Fenders
- 5.2 mm Lauan Interior Sidewall Liner
- 3/4" Plywood Floor (*Undercoated & Gray Painted Topcoat*)
- One-Piece Aluminum Roof
- .030 Prefinished Aluminum Exterior (*12 colors*)
- .080 Aluminum Roof Cove/Drip Rail (*Radius Roof models only*)
- Silver Frost Rear Accents (*Cornerposts & Header*)
- LED Oval Tail Lights
- Swing Down Rear Stabilizer Jacks
- Improved wire connections & secure routing (*reduces electrical shorts*)



**Model RF5X81**





## SPECIFICATIONS — 5' Wide Cargo

MODEL	Radius Front		V-Front	
	RF5X81	RF5X101	RFV5X81	RFV5X101
Body Length:	8'9"	10'9"	9'5"	11'5"
Body Width:	5'0"	5'0"	5'0"	5'0"
Overall Length:	11'6"	13'6"	11'6"	13'6"
Overall Width:	6'8"	6'8"	6'8"	6'8"
Overall Height:	7'4"	7'4"	7'2"	7'2"
Interior Length:	8'5"	10'5"	9'1"	11'1"
Interior Width:	4'8"	4'8"	4'8"	4'8"
Interior Height:	5'7"	5'7"	5'6"	5'6"
Platform Height:	18"	18"	18"	18"
Axles Quantity:	Single	Single	Single	Single
Axle Type:	4" Drop	4" Drop	4" Drop	4" Drop
Suspension:	Torflex®	Torflex®	Torflex®	Torflex®
Radial Tire Size/Load Range:	15"/C	15"/C	15"/C	15"/C
Wheel Bolt Pattern:	5-Bolt	5-Bolt	5-Bolt	5-Bolt
Hitch Ball Size:	2"	2"	2"	2"
Hitch to Top of Ball:	16"	16"	16"	16"
Hitch Weight:	10-15%	10-15%	10-15%	10-15%
Curb Weight:	880	985	935	1050
GVWR:	2980	2980	2980	2980
Average Payload Capacity:	2100	1995	2045	1930
Rear Door Style:	Double Doors	Double Doors	Double Doors	Double Doors
Rear Door Dimensions: W x H	51" x 61"	51" x 61"	51" x 61"	51" x 61"
Side Door:	Optional	Optional	Optional	Optional
Side Door Dimensions: W x H	Optional	Optional	Optional	Optional
Tube Main Rails:	2" x 3"	2" x 3"	2" x 3"	2" x 3"
12 Volt End Connector:	4-way	4-way	4-way	4-way
Electric Brakes:	Optional	Optional	Optional	Optional

Standard features, specifications & dimensions subject to change without notice.



**Model RFV5X81**

>> Options: Rear Ramp Door





CARGO



#### STANDARD FEATURES — 6' Wide Models

- Choice of: Radius Front/Radius Roof with TPO Silver Cap or V-Front/Flat Roof with Cast Aluminum Rear Corner Caps
- Pre-Framed Side Door with Flush Lock & Dead Bolt
- 12V Dome Lights (2) with Wall Switch
- 24" ATP Stoneguard
- Entire Chassis Undercoated
- Torflex Torsion Suspension with E-Z Lube Hubs
- Nev-R-Adjust Self Adjusting Brakes (*Tandem Axle models*)
- 15" Radial Tires with Silver Spoke Wheels
- Smooth Aluminum Jeep Fenders (*Single Axle*) or Flare Fenders (*Tandem Axle*)
- 5.2 mm Lauan Sidewall Liner (*3/8" Tandem Axle models*)
- 3/4" Plywood Floor (*Undercoated & Gray Painted Topcoat*)
- One-Piece Aluminum Roof
- .030 Prefinished Aluminum Exterior (*12 colors*)
- .080 Aluminum Roof Cove/Drip Rail (*Radius Roof models*)
- Silver Frost Rear Accents (*Cornerposts & Header*)
- LED Oval Tail Lights
- Swing Down Rear Stabilizer Jacks
- Improved wire connections & secure routing (*reduces electrical shorts*)



Model RFV6X101



Model RF6X121





# SPECIFICATIONS — 6' Wide Cargo

MODEL	Radius Front					V-Front				
	RF6X101	RF6X121	RF6X122	RF6X141	RF6142	RFV6X101	RFV6X121	RFV6X122	RFV6X141	RFV6X142
Body Length:	10'9"	12'9"	12'9"	14'9"	14'9"	11'7"	13'7"	13'7"	15'7"	15'7"
Body Width:	6'0"	6'0"	6'0"	6'0"	6'0"	6'0"	6'0"	6'0"	6'0"	6'0"
Overall Length:	14'0"	16'0"	16'0"	18'0"	18'0"	14'0"	16'0"	16'0"	18'0"	18'0"
Overall Width:	7'8"	7'8"	7'8"	7'8"	7'8"	7'8"	7'8"	7'8"	7'8"	7'8"
Overall Height:	7'10"	7'10"	7'11"	7'10"	7'11"	7'8"	7'8"	7'9"	7'8"	7'9"
Interior Length:	10'5"	12'5"	12'5"	14'5"	14'5"	11'3"	13'3"	13'3"	15'3"	15'3"
Interior Width:	5'8"	5'8"	5'8"	5'8"	5'8"	5'8"	5'8"	5'8"	5'8"	5'8"
Interior Height:	6'1"	6'1"	6'1"	6'1"	6'1"	6'0"	6'0"	6'0"	6'0"	6'0"
Platform Height:	18"	18"	19"	18"	19"	18"	18"	19"	18"	19"
Axles Quantity:	Single	Single	Tandem	Single	Tandem	Single	Single	Tandem	Single	Tandem
Axle Type:	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop
Suspension:	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®
Radial Tire Size/Load Range:	15"/C	15"/C	15"/C	15"/C	15"/C	15"/C	15"/C	15"/C	15"/C	15"/C
Wheel Bolt Pattern:	5-Bolt	5-Bolt	5-Bolt	5-Bolt	5-Bolt	5-Bolt	5-Bolt	5-Bolt	5-Bolt	5-Bolt
Hitch Ball Size:	2"	2"	2 <sup>5</sup> / <sub>16</sub> "	2"	2 <sup>5</sup> / <sub>16</sub> "	2"	2"	2 <sup>5</sup> / <sub>16</sub> "	2"	2 <sup>5</sup> / <sub>16</sub> "
Hitch to Top of Ball:	16"	16"	17"	16"	17"	16"	16"	17"	16"	17"
Hitch Weight:	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%
Curb Weight:	1100	1250	1650	1400	1800	1195	1325	1740	1455	1870
GVWR:	2980	2980	7000	2980	7000	2980	2980	7000	2980	7000
Average Payload Capacity:	1880	1730	5350	1580	5200	1785	1655	5260	1525	5130
Rear Door Style:	Double	Double	Double	Double	Double	Double	Double	Double	Double	Double
Rear Door Dimensions: W x H	63" x 67"	63" x 67"	63" x 67"	63" x 67"	63" x 67"	63" x 67"	63" x 67"	63" x 67"	63" x 67"	63" x 67"
Side Door:	Flush Lock	Flush Lock	Flush Lock	Flush Lock	Flush Lock	Flush Lock	Flush Lock	Flush Lock	Flush Lock	Flush Lock
Side Door Dimensions: W x H	32" x 60"	32" x 60"	32" x 60"	32" x 60"	32" x 60"	32" x 66"	32" x 66"	32" x 66"	32" x 66"	32" x 66"
Tube Main Rails:	2" x 3"	2" x 3"	2" x 4"	2" x 3"	2" x 4"	2" x 3"	2" x 3"	2" x 4"	2" x 3"	2" x 4"
12 Volt End Connector:	4-way	4-way	7-way	4-way	7-way	4-way	4-way	7-way	4-way	7-way
Electric Brakes:	Optional	Optional	Yes	Optional	Yes	Optional	Optional	Yes	Optional	Yes

Standard features, specifications & dimensions subject to change without notice.







CARGO

### Model RF7X162

#### STANDARD FEATURES — 7' Wide Models

- Choice of: Radius Front/Radius Roof with Silver TPO Cap or V-Front/Flat Roof with Cast Aluminum Rear Corner Caps
- Pre-Framed Side Door with Flush Lock & Dead Bolt
- 12V Dome Lights (2) with Wall Switch
- 24" ATP Stoneguard
- Entire Chassis Undercoated
- Torflex Torsion Suspension with E-Z Lube Hubs
- Nev-R-Adjust Self Adjusting Brakes
- 15" Radial Tires with Silver Spoke Wheels
- Smooth Aluminum Jeep Fenders (*Single Axle*) or Flare Fenders (*Tandem Axle*)
- 3/8" Plywood Interior Sidewall Liner (*5.2 mm Lauan Single Axle models*)
- 3/4" Plywood Floor (*Undercoated & Gray Painted Topcoat*)
- One-Piece Aluminum Roof
- .030 Prefinished Aluminum Exterior (*12 colors*)
- .080 Aluminum Roof Cove/Drip Rail (*Radius Roof models only*)
- Silver Frost Rear Accents (*Cornerposts & Header*)
- LED Oval Tail Lights
- Swing Down Rear Stabilizer Jacks
- Improved wire connections & secure routing (*reduces electrical shorts*)



### Model RFV7X142

>> Options: Rear Ramp Door

### Model RF7X162





# SPECIFICATIONS — 7' Wide Cargo

## MODEL

	Radius Front				V-Front			
	RF7X121	RF7X122	RF7X142	RF7X162	RFV7X121	RFV7X122	RFV7X142	RF7VX162
Body Length:	12'9"	12'9"	14'9"	16'9"	13'7"	13'7"	15'7"	17'7"
Body Width:	7'0"	7'0"	7'0"	7'0"	7'0"	7'0"	7'0"	7'0"
Overall Length:	15'8"	15'8"	17'8"	19'8"	15'8"	15'8"	17'8"	19'8"
Overall Width:	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"
Overall Height:	8'5"	8'5"	8'5"	8'5"	8'3"	8'3"	8'3"	8'3"
Interior Length:	12'5"	12'5"	14'5"	16'5"	13'3"	13'3"	15'3"	17'3"
Interior Width:	6'8"	6'8"	6'8"	6'8"	6'8"	6'8"	6'8"	6'8"
Interior Height:	6'7"	6'7"	6'7"	6'7"	6'6"	6'6"	6'6"	6'6"
Platform Height:	19"	19"	19"	19"	19"	19"	19"	19"
Axles Quantity:	Single	Tandem	Tandem	Tandem	Single	Tandem	Tandem	Tandem
Axle Type:	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop
Suspension:	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®
Radial Tire Size/Load Range:	15"/C	15"/C	15"/C	15"/C	15"/C	15"/C	15"/C	15"/C
Wheel Bolt Pattern:	5-Bolt	5-Bolt	5-Bolt	5-Bolt	5-Bolt	5-Bolt	5-Bolt	5-Bolt
Hitch Ball Size:	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "
Hitch to Top of Ball:	17"	17"	17"	17"	17"	17"	17"	17"
Hitch Weight:	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%
Curb Weight:	1410	1810	1975	2140	1560	1975	2125	2275
GVWR:	3500	7000	7000	7000	3500	7000	7000	7000
Average Payload Capacity:	2090	5190	5025	4860	1940	5025	4875	4725
Rear Door Style:	Double	Double	Double	Double	Double	Double	Double	Double
Rear Door Dimensions: W x H	75" x 73"	75" x 73"	75" x 73"	75" x 73"	75" x 73"	75" x 73"	75" x 73"	75" x 73"
Side Door Style:	Flush Lock	Flush Lock	Flush Lock	Flush Lock	Flush Lock	Flush Lock	Flush Lock	Flush Lock
Side Door Dimensions: W x H	36" x 66"	36" x 66"	36" x 66"	36" x 66"	36" x 72"	36" x 72"	36" x 72"	36" x 72"
Tube Main Rails:	2" x 4"	2" x 4"	2" x 4"	2" x 4"	2" x 4"	2" x 4"	2" x 4"	2" x 4"
12 Volt End Connector:	7-way	7-way	7-way	7-way	7-way	7-way	7-way	7-way
Electric Brakes:	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Standard features, specifications & dimensions subject to change without notice.



**Model RFV7X142**

>> Options: Rear Ramp Door



## AUTO & RACE

Unlike the other models in the **Road Force** line-up, the 8.5' wide is an auto hauler at heart. If you're a collector or a racer looking for superior quality, durability, and style, then the 8.5' **Road Force** is a smart choice. For starters, the **Road Force** features an extra wide 94" rear ramp door opening, no-show beavertail, side door with recessed step, roof vent, and tie-down rings — all standard. Factor in the radial tires, LED Slim Line tail lights, Nev-R-Adjust brakes, and a 4-year limited warranty; now you know you've got a trailer that's packed with value and built to last!




**Model RF85X202**

**Model RF85X202**



**Model RFV85X202**  
>> Options: Deluxe Package

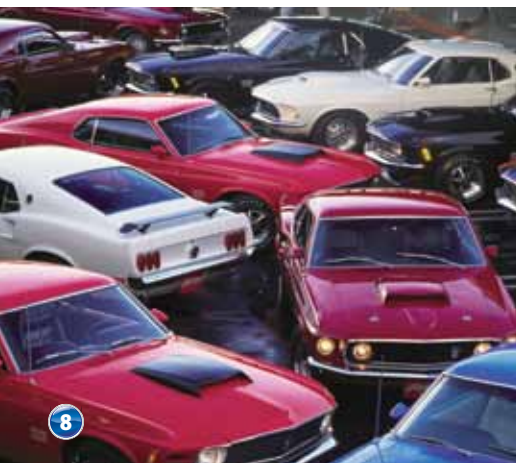

**Model RFV85X202**





# STANDARD FEATURES — 8.5' Wide Auto & Race

- Choice of: Radius Front/Radius Roof with Silver TPO Cap or V-Front/Flat Roof with Cast Aluminum Rear Corner Caps
- Rear Ramp Door with Spring Assist
- Beavertail (16' & 18' models = 32", 20' & 22' models = 48", 24' models = 72")
- 16" Plywood Ramp Extension
- Pre-Framed Side Door with Flush Lock & Dead Bolt
- Recessed Interior Step at Side Door
- 12V Dome Lights (2) with Wall Switch
- 24" ATP Stoneguard
- 3-Piece A-Frame
- Entire Chassis Undercoated
- Torflex Torsion Suspension with E-Z Lube Hubs
- Nev-R-Adjust Self Adjusting Brakes
- 15" Radial Tires with Silver Spoke Wheels
- Smooth Aluminum Flare Fenders
- 3/8" Plywood Interior Sidewall Liner
- 3/4" Plywood Floor (Undercoated & Gray Painted Topcoat)
- One-Piece Aluminum Roof
- .030 Prefinished Aluminum Exterior (12 colors)
- .080 Aluminum Roof Cove/Drip Rail (Radius Roof models only)
- Silver Frost Rear Accents (Cornerposts & Header)
- Slim Line LED Tail Lights
- Drop Down Rear Stabilizer Jacks
- 14" x 14" Non-Powered Roof Vent
- 5000 lb. D-Rings (4)
- Improved wire connections & secure routing (reduces electrical shorts)



Slim Line LED Tail Lights



14" x 14" Non-Powered Roof Vent



Plywood Ramp Extension



Pre-Framed Side Door with Flush Lock

 **NEV-R-ADJUST™**  
FORWARD SELF-ADJUSTING ELECTRIC BRAKES

Standard features, specifications & dimensions subject to change without notice.





# SPECIFICATIONS — 8.5' Wide Auto & Race (Radius Front)

MODEL	7000 GVWR					10,000 GVWR				
	RF85X162	RF85X182	RF85X202	RF85X222	RF85X242	RF85X164	RF85X184	RF85X204	RF85X224	RF85X244
Body Length:	16'9"	18'9"	20'9"	22'9"	24'9"	16'9"	18'9"	20'9"	22'9"	24'9"
Body Width:	8'4"	8'4"	8'4"	8'4"	8'4"	8'4"	8'4"	8'4"	8'4"	8'4"
Overall Length:	19'6"	21'6"	23'6"	25'6"	27'6"	19'6"	21'6"	23'6"	25'6"	27'6"
Overall Width:	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"
Overall Height:	8'7"	8'7"	8'7"	8'7"	8'7"	8'8"	8'8"	8'8"	8'8"	8'8"
Interior Length:	16'5"	18'5"	20'5"	22'5"	24'5"	16'5"	18'5"	20'5"	22'5"	24'5"
Interior Width:	8'0"	8'0"	8'0"	8'0"	8'0"	8'0"	8'0"	8'0"	8'0"	8'0"
Interior Height:	6'7"	6'7"	6'7"	6'7"	6'7"	6'7"	6'7"	6'7"	6'7"	6'7"
Platform Height:	22"	22"	22"	22"	22"	23"	23"	23"	23"	23"
Axles Quantity:	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem
Axle Type:	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop
Suspension:	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®
Radial Tire Size/Load Range:	15"/C	15"/C	15"/C	15"/C	15"/C	15"/D	15"/D	15"/D	15"/D	15"/D
Wheel Bolt Pattern:	5-Bolt	5-Bolt	5-Bolt	5-Bolt	5-Bolt	6-Bolt	6-Bolt	6-Bolt	6-Bolt	6-Bolt
Hitch Ball Size:	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "
Hitch to Top of Ball:	20"	20"	20"	20"	20"	21"	21"	21"	21"	21"
Hitch Weight:	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%
Curb Weight:	2805	3025	3245	3465	3685	2970	3190	3410	3630	3850
GVWR:	7000	7000	7000	7000	7000	10,000	10,000	10,000	10,000	10,000
Average Payload Capacity:	4195	3975	3755	3535	3315	7030	6810	6590	6370	6150
Rear Door Style:	Ramp	Ramp	Ramp	Ramp	Ramp	Ramp	Ramp	Ramp	Ramp	Ramp
Rear Door Dimensions: W x H	94" x 75"	94" x 75"	94" x 75"	94" x 75"	94" x 75"	94" x 75"	94" x 75"	94" x 75"	94" x 75"	94" x 75"
Side Door Style:	Flush Lock	Flush Lock	Flush Lock	Flush Lock	Flush Lock	Flush Lock	Flush Lock	Flush Lock	Flush Lock	Flush Lock
Side Door Dimensions: W x H	36" x 72"	36" x 72"	36" x 72"	36" x 72"	36" x 72"	36" x 72"	36" x 72"	36" x 72"	36" x 72"	36" x 72"
Tube Main Rails:	2" x 6"	2" x 6"	2" x 6"	2" x 6"	2" x 6"	2" x 6"	2" x 6"	2" x 6"	2" x 6"	2" x 6"
12 Volt End Connector:	7-way	7-way	7-way	7-way	7-way	7-way	7-way	7-way	7-way	7-way
Electric Brakes:	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

# SPECIFICATIONS — 8.5' Wide Auto & Race (V-Front)


MODEL	7000 GVWR					10,000 GVWR				
	RFV85X162	RFV85X182	RFV85X202	RFV85X222	RFV85X242	RFV85X164	RFV85X184	RFV85X204	RFV85X224	RFV85X244
Body Length:	17'10"	19'10"	21'10"	23'10"	25'10"	17'10"	19'10"	21'10"	23'10"	25'10"
Body Width:	8'4"	8'4"	8'4"	8'4"	8'4"	8'4"	8'4"	8'4"	8'4"	8'4"
Overall Length:	19'6"	21'6"	23'6"	25'6"	27'6"	19'6"	21'6"	23'6"	25'6"	27'6"
Overall Width:	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"
Overall Height:	8'7"	8'7"	8'7"	8'7"	8'7"	8'8"	8'8"	8'8"	8'8"	8'8"
Interior Length:	17'6"	19'6"	21'6"	23'6"	25'6"	17'6"	19'6"	21'6"	23'6"	25'6"
Interior Width:	8'0"	8'0"	8'0"	8'0"	8'0"	8'0"	8'0"	8'0"	8'0"	8'0"
Interior Height:	6'7"	6'7"	6'7"	6'7"	6'7"	6'7"	6'7"	6'7"	6'7"	6'7"
Platform Height:	22"	22"	22"	22"	22"	23"	23"	23"	23"	23"
Axles Quantity:	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem
Axle Type:	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop
Suspension:	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®
Radial Tire Size/Load Range:	15"/C	15"/C	15"/C	15"/C	15"/C	15"/D	15"/D	15"/D	15"/D	15"/D
Wheel Bolt Pattern:	5-Bolt	5-Bolt	5-Bolt	5-Bolt	5-Bolt	6-Bolt	6-Bolt	6-Bolt	6-Bolt	6-Bolt
Hitch Ball Size:	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>5</sup> / <sub>16</sub> "
Hitch to Top of Ball:	20"	20"	20"	20"	20"	21"	21"	21"	21"	21"
Hitch Weight:	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%
Curb Weight:	2580	2900	3220	3540	3860	2640	2980	3320	3660	4000
GVWR:	7000	7000	7000	7000	7000	10,000	10,000	10,000	10,000	10,000
Average Payload Capacity:	4420	4100	3780	3460	3140	7360	7020	6680	6340	6000
Rear Door Style:	Ramp	Ramp	Ramp	Ramp	Ramp	Ramp	Ramp	Ramp	Ramp	Ramp
Rear Door Dimensions: W x H	94" x 75"	94" x 75"	94" x 75"	94" x 75"	94" x 75"	94" x 75"	94" x 75"	94" x 75"	94" x 75"	94" x 75"
Side Door Style:	Flush Lock	Flush Lock	Flush Lock	Flush Lock	Flush Lock	Flush Lock	Flush Lock	Flush Lock	Flush Lock	Flush Lock
Side Door Dimensions: W x H	36" x 78"	36" x 78"	36" x 78"	36" x 78"	36" x 78"	36" x 78"	36" x 78"	36" x 78"	36" x 78"	36" x 78"
Tube Main Rails:	2" x 6"	2" x 6"	2" x 6"	2" x 6"	2" x 6"	2" x 6"	2" x 6"	2" x 6"	2" x 6"	2" x 6"
12 Volt End Connector:	7-way	7-way	7-way	7-way	7-way	7-way	7-way	7-way	7-way	7-way
Electric Brakes:	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes



# ENGINEERING

- |  |  |  |
|--|--|--|
| 1) Torflex Torsion Axles with E-Z Lube Hubs    | 9) Swing-Down Stabilizer Jacks (8.5' = Drop-Down)      | 17) 12V Dome Lights (2) with Wall Switch                   |
| 2) Silver Spoke Wheels                         | 10) .030 Prefinished Aluminum Exterior                 | 18) 24" ATP Stoneguard                                     |
| 3) 15" Radial Tires                            | 11) .080 Aluminum Roof Cove with Drip Rail             | 19) 3/4" Plywood Floor (undercoated & painted gray)        |
| 4) Smooth Aluminum Fenders                     | 12) One-Piece Aluminum Roof                            | 20) LED Tail Lights (5'; 6' & 7' = Oval, 8.5' = Slim Line) |
| 5) Vertical Posts on 16" Centers               | 13) Silver TPO Front End Cap                           | 21) Silver Frost Rear Accents (cornerposts & header)       |
| 6) Crossmembers on 24" Centers                 | 14) Double Rear Doors with Insulated Core Frame        | 22) Dexter® Nev-R-Adjust Brakes                            |
| 7) Roof Bows/Trusses on 24" Centers            | 15) Pre-Framed Side Door with Flush Lock & Dead Bolt   | (standard on trailers equipped with electric brakes)       |
| 8) Steel Plywood Channel (protects floor edge) | 16) Plywood Sidewall Liner (thickness varies by model) |  |

**NEV-R-ADJUST™**  
FORWARD SELF-ADJUSTING ELECTRIC BRAKES



Standard features, specifications & dimensions subject to change without notice.

## DELUXE PACKAGE

There's no doubt that the **Road Force** delivers an impressive standard feature offering. But let's admit it; it's hard to resist the temptation to add more options. We all deserve the right to indulge a little! You'll be hard pressed to find a better value than our Deluxe Package. It beefs up the frame, dresses up the interior, and adds flash to the exterior. All at a price that makes it a no-brainer.

- |                                    |                                   |
|------------------------------------|-----------------------------------|
| • Crossmembers on 16" Centers      | • Roof Bows on 16" Centers        |
| • White Vinyl Ceiling Liner        | • White Vinyl Sidewall Liner      |
| • Chrome Wheel Trim Rings          | • ABS Chrome Hub Covers           |
| • Chrome Front Corners (or V-Nose) | • Chrome Rear Corners/Header      |
| • 12V Cargo Light                  | • 48" x 72" Pre-Framed Side Door* |



Deluxe Package interior shown on a Road Force 8.5' wide model

\*Larger Side Door only applies to Road Force 8.5' wide models



## Wells Cargo and Our Legacy of Engineering Leadership



Many people say that all enclosed trailers look pretty much alike. We consider that a compliment since it was Wells Cargo who pioneered the industry over 55 years ago. State-of-the-art takes on a whole new meaning when you compare the first trailer we built in 1954 with our product line today. Old "No. 1" looked pretty good back then, but we've come a long way since. Experience has made the difference and ours is unmatched. Our Research & Development facilities keep us the frontrunners of the industry. After thorough evaluation and comparison, we think you'll agree that Wells Cargo has earned our long standing reputation as the premium cargo trailer on the market and the best overall investment.


Rest assured that after you make the decision to buy a Road Force, our commitment to you is not over. Our comprehensive 4-Year Limited Warranty is more than just words. It's about how quickly and responsibly we respond to your needs. It's the peace-of-mind you get knowing your investment is protected by an established company with a solid reputation. If our work or materials are at fault, we'll make it right. Any one of our six manufacturing facilities or our national network of professional dealers stand ready to service your trailer should the unlikely need arise.



**AUTHORIZED WELLS CARGO DEALER**

## EXTERIOR COLORS

### .030 Prefinished Aluminum Skin



White



Victory Red



Black



Pewter



Indigo Blue



Champagne



Yellow\*



Beige



Charcoal Gray



Silver Frost



Orange\*



Dark Green

\*Certain special colors available at additional charge.

Skin colors shown are representative only. See your dealer for accurate samples.



**BY UNIVERSAL TRAILER**

©Wells Cargo, Inc. 2011 LITHO USA Form ROADFORCE0511

**(800) 348-7553    [www.wellscargo.com](http://www.wellscargo.com)**

**Elkhart, IN  
McAdoo, PA**

**Waco, TX  
Phoenix, AZ**

**Ogden, UT  
Waycross, GA**